
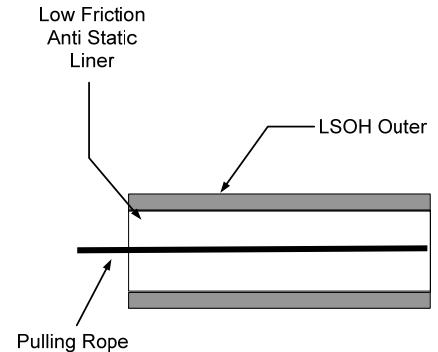


## Verticasa Drop Tube - Internal

**Prysmian Part Numbers: See below**



Verticasa Drop Tubes are used to route Verticasa fibre modules to the customers premises. The internal drop tube is a 5mm diameter LSOH tube with a low friction liner on the inside wall of the tube. The tube also contains a pre-installed pulling rope to make fibre installation easy.

## Features and Benefits

- Low Friction tube with an anti static bore.
- Supplied with a pulling rope pre-installed for easy fibre installation.
- Tube plugs are available to ensure access to the pulling rope when cutting the drop tube into lengths.
- Available in internal and external formats. External format is the internal tube with an extra polyethylene sheath. See data sheet AC018.
- Reduced Fire Hazard Tube.

## Part Numbers

- **XBFSC00383** – 5mm internal Drop Tube – 500m Drum
- **XBFSC00358** – 5mm Internal Drop Tube – 1km Drum
- **XBFSC00359** – 5mm Internal Drop Tube – 2km drum

## Additional Items

- **XBFSC00363** – Verticasa Tube Plugs (pack of 10)

The Verticasa Tube Plugs are used to grip the pulling rope in the end of the tube and stop it from slipping back inside the tube. They are ideal for gripping the rope when cutting the drop tubes into various lengths.

## Technical Data

- Outer tube diameter: 5.0mm
- Inner tube diameter: 3.5mm
- Maximum Tensile: 80N
- Crush Rating: 0.4kN
- Impact: 1J
- Operating temperature: -20°C to + 40°C (5 to 95% RH)
- Material:- LSOH UL94 V0
- Finish:- White

Please contact your local sales office listed on [www.prysmiangroup.com](http://www.prysmiangroup.com)

© Prysmian Group 2012, All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed correct at the time of issue. Prysmian Group reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.