



Oil & Gas - Cable Solutions

Exploration & Production - Offshore FPSO

Medium Voltage Cables

IEC 60092-354

Cu/XLPE or EPR/CTS/LSZH

Cu/XLPE or EPR/CTS/LSZH/GSWB or (T)CWB/LSZH

3,6/6 12/20 kV

Distribution cables up to 12/20 kV. Flame retardant, low smoke, halogen free. Armoured/Unarmoured. Arctic Grade design option available on demand.

APPLICATION

Medium Voltage cables are used for power distribution applications or to connect equipment that requires large amounts of power on ships and offshore platforms. Prysmian offers a wide range of MV cables with diverse design options depending on the reference standards and customer requirements.

STANDARDS & APPROVALS

IEC 60092-350 Design guidelines

IEC 60092-352 Choice and installation of electric cables

IEC-60092-354 Design guidelines

IEC 60092-360 Insulating and sheathing materials

IEC 60332-1-2 Flame retardance

IEC-60332-3-22 Fire retardance

IEC-60754-1 / ...-2 Halogen free properties

IEC-61034-1 / ...2 Smoke emission properties

on request

CSA 22.2 Cold bend/impact test at -40 °C /-35 °C

Det Norske Veritas-Germanischer Lloyd (DNV-GL)

American Bureau of Shippings (ABS)

Lloyds Register of Shipping (LRS)

Bureau Veritas (BV)

Russiam Maritime Register of Shipping (RMRS)

RINa (Registro Italiano Navale)

DESIGN & CONSTRUCTION

1 CONDUCTOR

Cu

Tinned (or plain) annealed copper conductor according to IEC 60228 cl. 2 (or cl.5 on request) from 16 to 300 mm², single core or three cores

2 CONDUCTOR SCREEN

Semiconducting tape and/or layer

3 INSULATION

XLPE or HEPR

XLPE, HEPR according to IEC 60092-360, thickness according to IEC 60092-354

4 INSULATION SCREEN

CTS

Semiconducting layer + copper tape

5 BEDDING/INNER COVERING (only armoured versions)

LSZH

Flame retardant and halogen free thermoplastic compound, SHF1 (IEC 60092-360)

6 ARMOURING (only armoured versions)

(T)CWB

Copper wire braid (tinned or plain)


or **GSWB**

Galvanized steel wire braid

7 OUTER SHEATH

LSZH

Flame retardant and halogen free thermoplastic compound, SHF1 (IEC 60092-360)

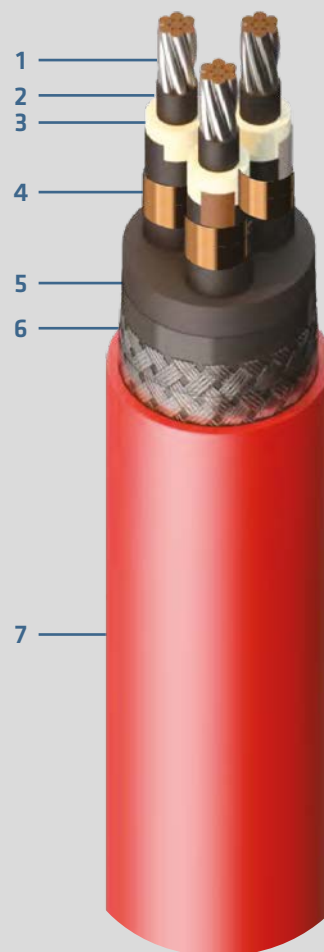

CONTACT INFO:

prysmianoilandgas@prysmiangroup.com

www.prysmiangroup.com/contact-us



Oil & Gas - Cable Solutions

Exploration & Production - Offshore FPSO

Medium Voltage Cables

IEC 60092-354

PERFORMANCES/RATINGS

FIRE BEHAVIOUR



IEC 60332-1-2
IEC 60332-3-22

CHEMICAL RESISTANCE



GOOD

IMPACTS



GOOD

SMOKE DENSITY, CORROSIVITY AND TOXICITY




LOW EMISSION

MIN. PERMISSIBLE AMBIENT TEMPERATURE DURING LAYING



-20 °C
(-40°C for Arctic Grade)

MAX OPERATING TEMPERATURE



+90 °C

SHORT CIRCUIT TEMPERATURE



+250 °C

UV RESISTANCE



GOOD

QUALITY & TESTING

Prysmian has a built-in multi-step quality assurance program, covering the production process from cable design and raw material purchases to final inspection and testing documentation.

The ISO 9001 quality system of Prysmian Group (together with ISO 14001 and OHSAS 18001) has been assessed, approved and is currently audited by SGS.

This product information sheet is provided for reference only. Please consult the factory or your representative to confirm all engineering information or refer to the related catalogues available in the local countries website.

CONTACT INFO:
prysmianoilandgas@prysmiangroup.com
www.prysmiangroup.com/contact-us

Prysmian
Group