


# ICS IE FIRETUF DATA 4P GSWB LSHF-FR

## IE SF/UTP 4x2xAWG22/1 cable with circuit integrity behavior

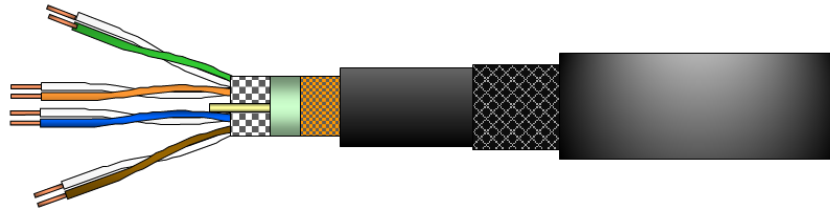

### Application

Campus wiring, Riser applications, Horizontal backbone wiring, Building control systems, Intelligent fire alarm systems. Circuit integrity structured wiring alarm cable, compatible with all known connection systems to EN 50173

IEEE 802.3: 10Base-T; (100Base-T <75m), IEEE 802.5 16 MB; ISDN; TPDDI; ATM RS485 (10Mbps)

### Standards

Generally to ISO/IEC 11801: 95, EN 50173:95; EN 50288-1

Generally catergised between Cat 3 and Cat 5 see notes <sup>1, 2, 3, 4, 5</sup>

Passes – ISO/IEC 11801 class D (95); TIA Cat 5 Ch (TSB67); ISO/IEC 11801 Class C

### Fire/Flame resistance

Low Smoke:	BSEN 50268, IEC 61034-2,	
Halogen Free:	IEC 60754-1&2	
Flame Retardant:	IEC 60332-1, IEC 60332-3-24, BS4066 part 3, UL 1581 VW 1	
Circuit Integrity:	BS5839-1 2002 (clause 26.2e); BS8434-2; BSEN 50200, IEC60331	
	BS5839 enhanced 3 in 1 test	Passed
	Continued data operation @ 950°C	> 2 hours
	BS6387 CWZ	Passed
	BS EN 50200 (IEC60331)	>3 hours

### Certification

Approved by LU (London Underground) – Independently tested by BRE Global.

Fire resistant BS5839-1 (clause 26.2e); BS8434-2; BSEN 50200

Flame retardant BS4066 part 3; Smoke emission BSEN 50268

LUL-Flammability, smoke & fume 2-01001-002

LU STANDARD e4156 part 1 – Approval ref TLL-ENG-MATTS-0076 (dated 21/06/2007)

### Construction

Conductor	Bare copper wire, Ø 0.65 mm (AWG 22) 0.332mm <sup>2</sup>
Insulation	PE/Silicone Rubber <sup>1</sup> , Ø PE 1.0mm and Silicone Rubber 1.7 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core
Fire protection wrapping	Glass tape
Screen	Aluminium tape + tinned copper braid + Drain Wire
Inner Sheath	Halogen free, flame retardant thermoplastic sheathing compound acc. to EN 50290-2-27, Ø OD - 10.5 mm
Protection	Galvanised Steel Wire Braid (GSWB) to EN 50288-7
Outer Sheath	Halogen free, flame retardant thermoplastic sheathing compound acc. to EN 50290-2-27, Ø OD 12.60mm
Colour	red RAL 3000
Marking	Firetuf Data (910245) 0.65mm x 4 pairs BS5839 + 26.2e Draka UK GSWB (then 105 spaces then) Firetuf Data (910245) 0.65mm x 4 pairs BS5839 + 26.2e Draka UK DD/MM/YY XXXX ###m

Note<sup>1</sup> – Silicone rubber insulation especially for circuit integrity cables

# ICS IE FIRETUF DATA 4P GSWB LSHF-FR

## Mechanical properties

Bending radius	without load	≥ 42 mm
	with load	≥ 84 mm
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

## Electrical properties

at 20°C ± 5°C

Loop resistance		≤ 110 Ω/km
Braid resistance		9.9Ω/Km
Drain wire + braid resistance		78Ω/Km (with braid = 8.79Ω/Km)
Resistance unbalance		≤ 2%
Insulation resistance	(500 V) 1 minute	≥ 2000 MΩ*km
Mutual capacitance	at 800 Hz	Nom. 60 nF/km
Capacitance unbalance	(pair/ground)	≤ 1600 pF/km
Characteristic impedance note <sup>2</sup>	(at 10) MHz	(100 ± 15) Ω
Nominal velocity of propagation note <sup>3</sup>		ca. 57 %
Test voltage	(DC, 1 min) core/core and core/screen	1000 V
Transfer impedance	at 10 MHz	5 mΩ/m

Note<sup>2</sup> - Structured cabling Characteristic Impedance is normally within (100 ± 5) Ω , due to the insulation system this is not achievable all the time


Note<sup>3</sup> Structured cabling systems minimum for c=65%, due to the insulation (PE + Sil Rbr) system this is not achieved, that is nvp 0,57

## Electrical data (nominal)



acc. to Cat.5(95)note<sup>4</sup> (at 20°C)

Note<sup>4</sup> Cat 5 (95) specification: not the Cat5e of today i.e. gigabit ethernet

Note<sup>5</sup> When used in a 100m Channel, 90m + 10m patch cords, the Class D (95) is fit for some purposes: it is advisable to approve a 100m sample and perform a trial on the system before installation

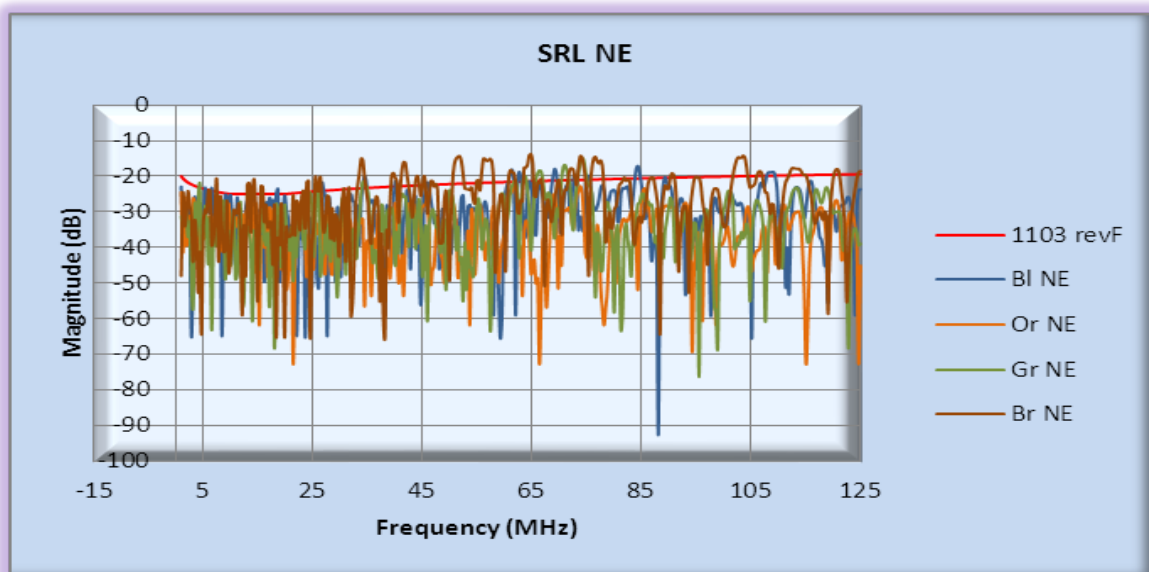

# ICS IE FIRETUF DATA 4P GSWB LSHF-FR

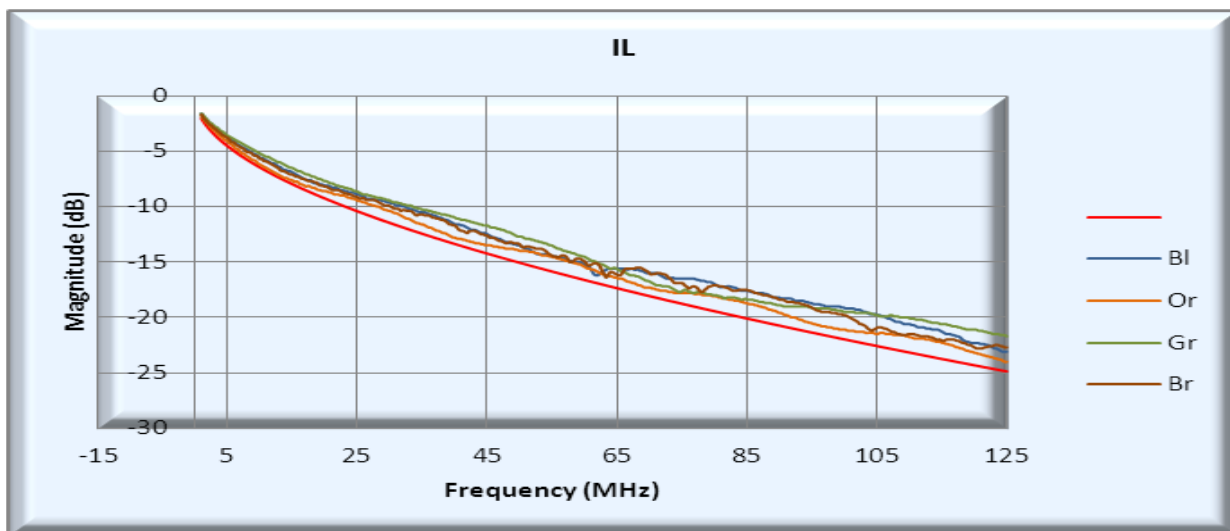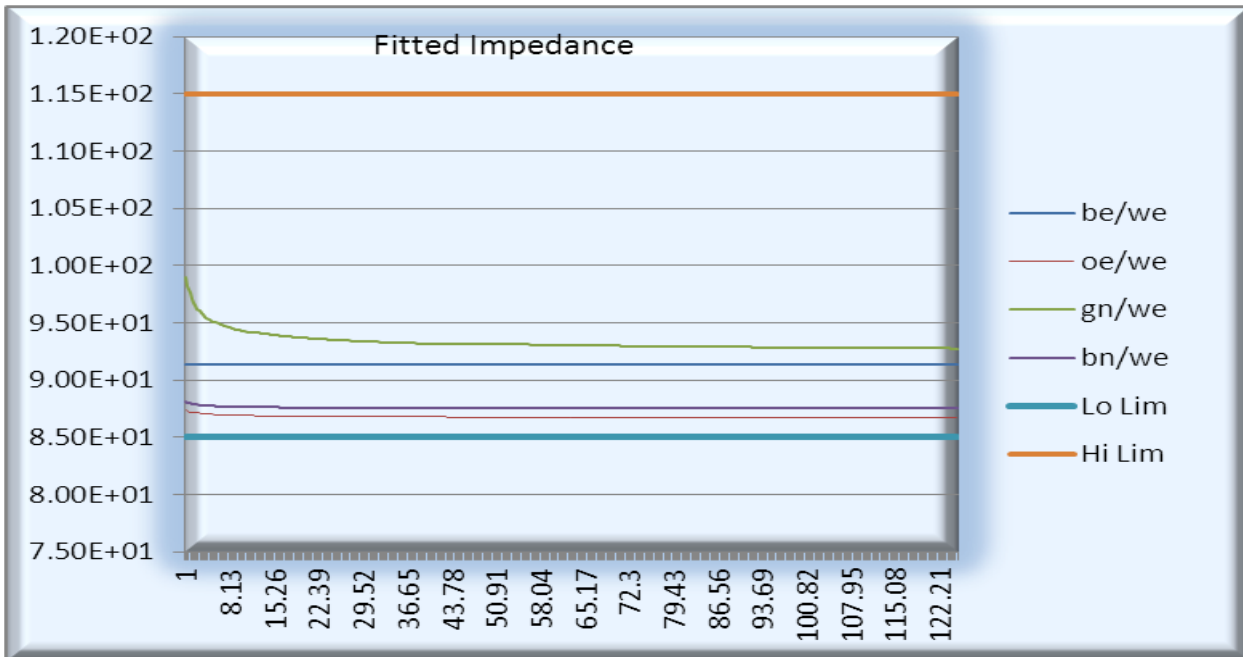

# ICS IE FIRETUF DATA 4P GSWB LSHF-FR

## Technical data

Product code	Cable type	Brand name	Outer diameter	Fire load		Weight kg/km	Copper content	Tensile force
			mm	MJ/km	kWh/m			N
600*TBD	J-2Y/2G(St)CH 4x2x0.65 -100	DRAKA ICS IE FIRETUF DATA 4P LSHF-FR Gy	12.6			265	56.9	100
60058210	J-2Y/2G(St)CH 4x2x0.65 -100	DRAKA ICS IE FIRETUF DATA 4P LSHF-FR Gy 1000	12.6			265	56.9	100

[PRODUCT CODE TABLE]

© PRYSMIAN GROUP 2011, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.