



Exploration & Production

Protectors

Low Friction Protector

SPECIALTY: LOW FRICTION PROTECTOR

Protectors are designed to ensure that all control lines and cables are protected for the full length of the production string, thus reducing the risk of damage to cable, control line, or flatpacks. PDT's Protector portfolio includes clamping and cable protection solutions to protect cables from lateral, axial, and rotational loading in downhole applications. In addition to our standard cross-coupling range, PDT designs application specific solutions for demanding situations

APPLICATION

PDT protectors can be enhanced with a coating of Teflon to reduce the friction between the protector and the casing.

STANDARDS & APPROVALS

- All parts comply with NACE Standard MR0175 / ISO 15156

QUALITY & TESTING

- Manufactured in accordance with standard Inspection and Quality Test Plans
- Design Validation Testing
 - Axial, Lateral, Rotational Testing
- Factory Acceptance Testing
 - Visual Inspection
 - Make Up / Fit Test
 - Dimensional Inspection
 - Gap Verification
 - Cable Pull test
 - Drift Verification
 - Torque Test

DESIGN & CONSTRUCTION

- Teflon coated to reduce friction
- One-piece assembly with captive fasteners
- No loose parts
- Interlocking Straps
- Hex or Allen Socket Bolt Option
- Chamfered ends to prevent hang up
- Supports minimum of 100' of downhole cable, control line, and flatpack weight
- Quick and Easy to install
- Reusable
- Custom designs to meet application

Materials

- Carbon Steel
- 316 SS
- 13Cr
- 25Cr
- Super Duplex
- Teflon Coating

Axial Loading

- 30 ton

Lateral Loading


- 30 ton

Rotational Loading

- 3 ton

Common Tubing Sizes

- 2- 3/8" / 2- 7/8" / 3- 1/2" / 4- 1/2" / 5" / 5- 1/2" / 6" / 6- 5/8" / 7"

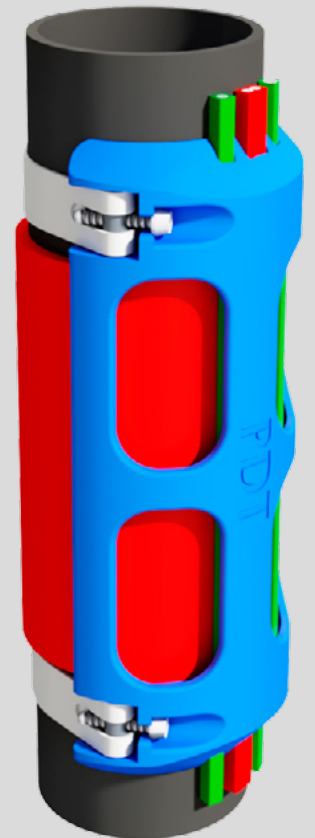

CONTACT INFO:

downhole@prysmiangroup.com

www.prysmiangroup.com/contact-us